


LED Globe

GL-03A

> Introduction

The GL-03A will eventually become the chief substitutes for incandescent lamps. It adopts aluminum-extruded structure. With the compact and beautiful appearance, the globe has great heat-sinking properties. It is also mothproof rated. In addition, it can be substituted for those lamps with E14 fixtures. This globe has great energy saving capacity. The simple installation can minimize the maintenance costs.

> Application Environment

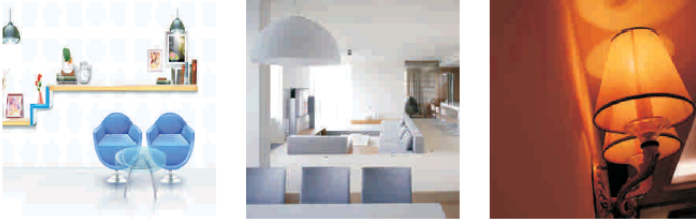

The LED globe can provide soft and symmetrical lighting without strobe. It can be used in places, such as residential homes, markets, hotels/motels, or offices.



CAP:E14
Design Picture



> Technical Parameters

Part NO.	Size (mm)		Weight(g)	Color
GL-03A	95×Φ48		78	Blue/ Gold/ Silver
Parameter	Min.	Standard	Max.	Remark
Operating Voltage(V AC)	100	110/220	250	/
Operating Frequency(Hz)	/	50/60	/	/
Power(W)	3.24	3.6	3.96	/
CCT(K)	/	6,530	/	Day Light
	/	5,665	/	
	/	3,045	/	Warm White
	/	2,725	/	
Luminous Flux(lm)	/	200	/	Day Light
	/	200	/	Warm White
Color Rendering Index	/	70	/	/
Operating Temperature(°C)	5	25	40	/
Operating Humidity	10%	60%	90%	/
Storage Temperature(°C)	-40	25	80	/
Quantity of LED(PCS)	6			
Body Material	AL+PC+Glass			
Packaging	25PCS / 50PCS / 100PCS /Carton(K5K5K)			
Package Size(mm)	345×345×136(25PCS) / 345×345×242(50PCS) 345×345×454(100PCS)			
Design Life(Hr)	40,000			

